



**BUREAU  
VERITAS**

1/2

Ref: BVIPL/SPL/BL/630/6/2017/ 160  
Test Order dated: 07.06.2017

Date: 6.08.2017

M/s. United Office Systems Pvt. Ltd.,  
Plot No. -62/1, 2 & 3, Vill-Vankas,  
Taluka-Umbergoan,  
Dist. Valsad – 396150, Gujrat

**TEST REPORT ON ACCESS FLOORING SYSTEM**


Source of sample / material : Access Flooring System verified at M/s United Office Systems Pvt. Ltd.  
Customer reference : Email dated: 07.05.2017 and 6.08.2017  
Date of test : 10.06.2017  
Tests Conducted : Rolling Load Test  
Sample Identification\* : Steel Cementitious Panels (Corner Lock /Laminated)  
Product Model No.\* : "UNITILE USF LFW 35 2500"  
Product code No.\* : UNITILE USF LFW 35 2500"  
Equipment used\* : Rolling Load Test Machine & Digital  
Dial Indicator, Sr.No. 13121370 Calibration date : 09.03.2017,  
Due date: 08.03.2018)  
Panel size (Nominal)\* : 600 mm x 600 mm  
Thickness /Gross weight of Panel\* : 35 mm/ 22.200 kg.  
Test Method : CISCA 2007, Section-3  
Witness by/Date of visit : Mr. Radhakrishna, Consultant  
Bureau Veritas, India Pvt. Ltd, Bangalore on 10.6.17

**TEST RESULTS**

Rolling load test by 6"x2" urethane tread wheel:-

Sample Reference	UNITILE USF LFW 35 2500				
	525(1157)				
Test load in Kg(lbf)	0 Pass	500 Passes	5,000 Passes	10,000 Passes	Deflection at 10000 passes relative to 0 pass
Measurement taken at (Refer below sketch)	0 Pass	500 Passes	5,000 Passes	10,000 Passes	Deflection at 10000 passes relative to 0 pass
Edge 1-2	0.05	0.04	0.04	0.03	-0.02
Edge 2-3	0.10	0.08	0.07	0.06	-0.04
Edge 3-4	0.11	0.10	0.07	0.06	-0.05
Edge 4-1	0.09	0.09	0.06	0.05	-0.04
Diagonal 1-3	-0.09	-0.12	-0.19	-0.27	-0.18
Diagonal 2-4	0.62	0.59	0.42	0.39	-0.23
Center A	0.32	0.29	0.27	0.21	-0.11
Center B	-0.34	-0.42	-0.46	-0.59	-0.25
Center C	0.08	0.02	-0.09	-0.16	-0.24
Center D	0.27	0.24	0.14	0.07	-0.20
Center E	0.50	0.46	0.35	0.33	-0.17
Center F	0.34	0.29	0.29	0.21	-0.13

contd.....

  
07/08/2017  
Bureau Veritas (India) Private Limited  
(Construction Services Laboratory)  
43, 45-47, Pete Chennappa Inds. Estate, 1st Main  
Magadi Road, Kamakshipalya, Bangalore - 560 079  
Tel.: +91 80 23011800 Fax: +91 80 26716833  
bangalore.lab@in.bureauveritas.com


**SANJEEV PATGAR**  
Manager LAB

Regd. Off. : Marwah Centre, 6th Floor  
K. Marwah Marg, Off Saki-Vihar Road  
Andheri (East), Mumbai - 400 072. India  
Tel.: +91 22 66956300 Fax: +91 22 66956309  
www.bureauveritas.co.in  
CIN : U74210MH2001PTC134262

Offices/Labs at: Ahmedabad, Baroda  
Bhopal, Chennai, Cochin, Coimbatore  
Delhi, Goa, Hubli, Hyderabad, Indore  
Jaipur, Kakinada, Kandla, Kolkata, Ludhiana  
Mangalore, Nagpur, Nashik, Pune, Raipur  
Surat, Trichy & Visakhapatnam

Ref: BVIPL/SPL/BL/630/6/2017/160  
 Test Order dated: 07.06.2017

Date: 6.08.2017

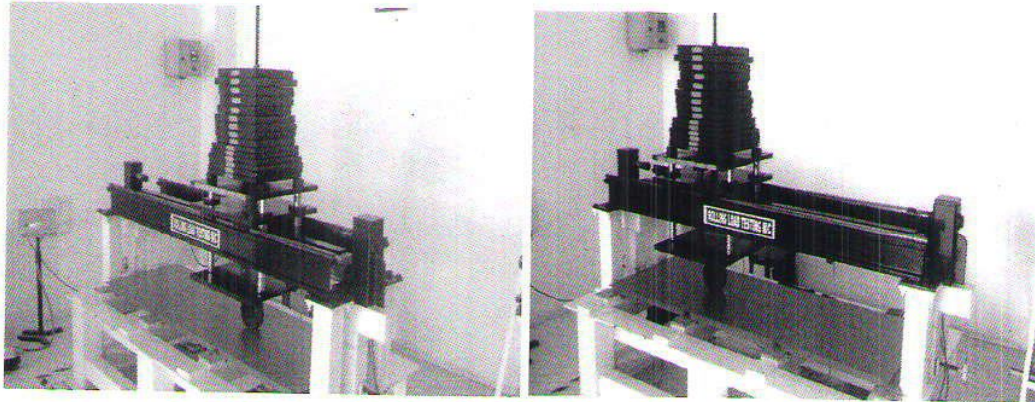

UNITILE USF LFW 35 2500 - TEST UNDER PROGRESS

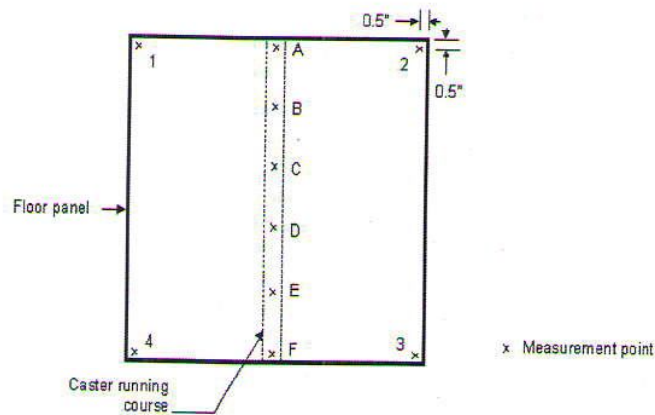


Figure 1 : Position of Measurement ( Rolling Load )

Remarks : All negative denote downward deflection

\* As furnished by the customer

- Note:**
1. The results relate only to the items tested.
  2. Report shall not be reproduced, except in full without the written approval of the lab.
  3. Any correction invalidates this report.

for **BUREAU VERITAS (INDIA) PRIVATE LIMITED**  
 Construction Services Laboratory

*Sanjeev Patgar*  
 07/08/2017

**SANJEEV PATGAR**  
 Manager LAB