



**BUREAU
VERITAS**

1/2

Ref: BVIPL/SPL/BL/630/6/2017/43
Test Order dated: 07.06.2017

Date: 21.06.2017

M/s. United Office Systems Pvt. Ltd.,
Plot No. -62/1, 2 & 3, Vill-Vankas,
Taluka-Umbergoan,
Dist. Valsad - 396150,
Gujrat


TEST REPORT ON ACCESS FLOORING SYSTEM

Customer reference : Email dated 07.05.2017
Date of test : 07.06.2017
Tests Conducted : a. Concentrated Load Test, b. Ultimate Load Test
Sample Identification* : Steel Cementious Panels (Corner Lock /Laminated)
Product Model No.* : "UNITILE USF LFW 35 1250"
Product code No.* : UNITILE USF LFW 35 1250"
Equipment used* : U.T.M (Load Cell, Sr. No. 400432, Maximum Capacity 4 Ton
Calibration date: 30.03.2017, Due date: 30.03.2018 & Digital
Dial Indicator, Sr.No. 030948 Calibration date : 09.03.2017,
Due date: 08.03.2018)
Panel size (Nominal)* : 600 mm x 600 mm
Thickness /Gross weight of Panel* : 35 mm/ 16.400 kg.
Test Method : CISCA 2007, Section - 1, Section - 2
Witness by/Date of visit : Mr. Radhakrishna, Consultant
Bureau Veritas, India Pvt.Ltd, Bangalore on 7.6.17

TEST RESULTS

Table 1: Concentrated Load Test:-

Sample reference	UNITILE USF LFW 1250		
	Center	Edge	Corner(**)
Test height in mm	300		
Location of indentor	Center	Edge	Corner(**)
Deflection in mm at pre-load of 22.7 kg.	0		
Deflection in mm at load of 567kg (5.55 kN)	1.59	1.63	1.31
Residual deflection in mm at pre-load	0.06	0.00	0.01


28/06/2017

SANJEEV PATGAR
Manager LAB


Contd...../-

Ref: BVIPL/SPL/BL/630/6/2017/43
 Test Order dated: 07.06.2017

Date: 21.06.2017

Table 2: Ultimate Loading Test:-

Sample reference	UNTILE USF LFW 1250		
Test height in mm	300		
Location of indenter	Center	Edge	Corner(**)
Maximum load in kg. (k N)	1590(15.60)	1480(14.50)	1448(14.19)

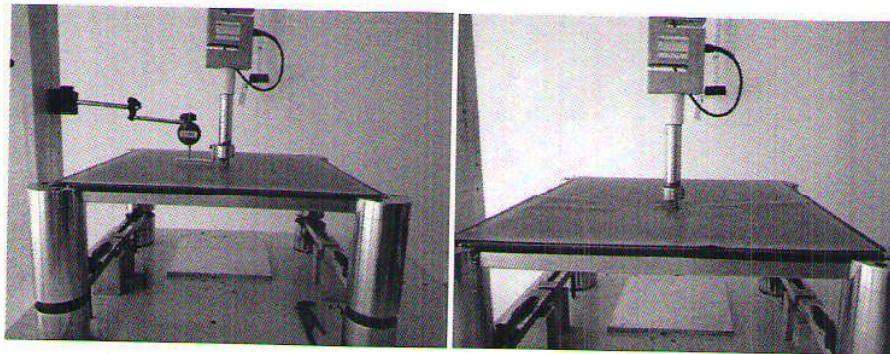

UNTILE USF LFW 1250 - TEST UNDER PROGRESS

Note:

1. The panel is supported with 4 steel block jigs.
 2. A new bare panel is used for each test. (Center, Edge, Corner **)
- ** -Weakest point is located at about 220mm x 220mm from the corners.

* As furnished by the customer

Note:

1. The results relate only to the items tested.
2. Report shall not be reproduced, except in full without the written approval of the lab.
3. Any correction invalidates this report.

for BUREAU VERITAS (INDIA) PRIVATE LIMITED
 Construction Services Laboratory

Sanjeev Patgar
 28/06/2017
SANJEEV PATGAR
 Manager LAB